



## 2 / 2 SOLENOID VALVE

Model	Inside structure			N.C.	N.O.	Fluid					Material		Port size	CV
	Piston	Diaphragm	Plunger			Water / Air	Hot water	Steam	Light oil	Heavy oil	Gas	Vacuum		
MBS			●	●		●		●	●	●	Brass	N J V T	1/8,1/4	0.03-0.18
MBD		●				●		●	●	●	Steel	N V	1/4-1/2	0.14-0.95
MCS			●	●		●		●	●	●	Brass	N J V T R	1/4-3/4	0.12-1.30
MED		●				●		●			Forged brass	N	1/4-1/2	1.3-2.2
MEP			●			●		●			Forged brass	N	3/8,1/2	1.8-2.2
MGA	●					●	●	●	●	●	Forged brass	N J V	3/8,1/2	1.9-2.6
MGS	●					●	●	●	●	●	Forged brass	T	3/8,1/2	1.9-2.6
MGD		●				●		●		●	Forged brass	N J V	3/8-2	2.0-31
MJS			●			●		●	●	●	Brass	N J V	-	0.10-0.42
MJR			●			●		●	●	●	Brass	N J V	-	0.10-0.42
MPD		●				●		●			PA(Nylon)	N J V	1/2-1	4-11
MPK		●				●		●			PA(Nylon)	N J V	1/2-1	4-11
MRB			●			●		●	●	●	Brass	N J V	1/8,1/4	0.05-0.09
MRC			●			●		●	●	●	Brass	N J V	1/8-3/8	0.10-0.31
MUSC			●			●		●	●	●	S.S.#303	N J V Z T R	1/8-3/8	0.03-1.30
MUSD				●		●		●	●	●	S.S.#SCS14	N J V	1/2	2.0
MWA	●					●		●			Brass	N	3/8-2	3.0-31
MWH	●					●		●		●	Brass	V	3/8-2	3.0-31
MWS	●					●		●	●	●	Brass	T	3/8-2	3.0-31
MWD		●				●		●	●	●	Forged brass	N J V	3/8-2	3.0-31
MWK		●				●		●	●	●	Forged brass	N J V	3/8-2	3.0-31
MYA	●					●	●	●	●	●	Forged brass	N J V	3/8,1/2	1.9-2.6
MYS	●					●	●	●	●	●	Forged brass	T	3/8,1/2	1.9-2.6
MZS			●			●		●	●	●	Forged brass	N J V Z	3/8-3/4	0.12-0.83
MUD			●			●		●	●	●	Forged brass	N V S P	1/8-3/8	0.23-0.58
MUS-8/10	●					●		●	●	●	Forged brass	P	1/4,3/8	0.23-0.58
MUDC		●				●	Hydrochloric acid, sulfuric acid				PVC/PTFE	N	1/4-1	0.28-4
MSUS	●					●		●	●	●	S.S.#304	N V S P	1/8-2	0.23-48
MUAO	●					●		●	●	●	Brass	N	1/4-1/2	2.5
MUW			●			●		●	●	●	Forged brass	N V S	3/8-2	2.4-48
MUW-NO			●			●		●	●	●	Forged brass	N V S	3/8-2	4.5-48
MUW-F			●			●		●	●	●	FC-20	N	1 1/4-4	22-180
MUG			●			●		●	●	●	Forged brass	N	3/8-2	2.4-48
MUV			●			●		●	●	●	Forged brass	N	3/8-2	2.4-48
MUAW	●					●		●	●	●	Forged brass	N	1/2-2	4-48
MUS	●					●		●	●	●	Forged brass	P	1/2-2	17-50
MUS-F	●					●		●	●	●	FC-20	P	1 1/4-4	22-175
MSUW			●			●		●	●	●	S.S.#304	N V S	1/2-2	4.5-48
MSUW-F			●			●		●	●	●	S.S.#304	N V S	1/2-2	4.5-48
MUPS	●					●		●	●	●	Forged brass	P	1/2-1	4-12
MXAD			●			●		●	●	●	Forged brass	N J V S	3/8-1/2	0.26-0.97
MXAD-AF			●			●		●	●	●	Forged brass	N J V S	3/8-2	4.5-48
MXBD			●			●		●	●	●	Forged brass	N J V S	3/8-1/2	1.23-0.79
MXCD			●			●		●	●	●	Forged brass	N V	3/8-1/2	2.4-2.7
MXPV			●			●		●	●	●	Forged brass	N J V S	3/8-1/2	4.5-9.3

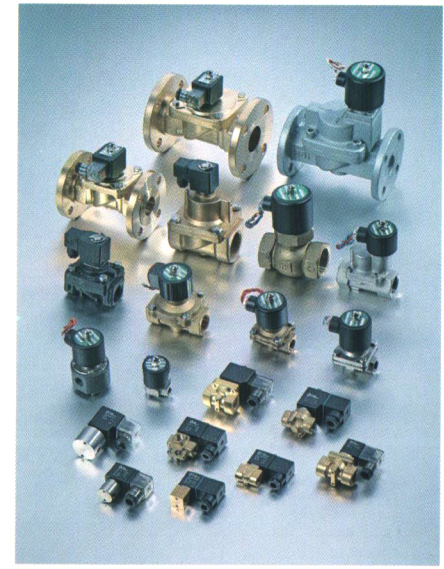

## 3 / 2 SOLENOID VALVE

Model	Inside structure			N.C.	N.O.	Fluid					Material		Port size	CV	
	Piston	Diaphragm	Plunger			Water / Air	Hot water	Steam	Light oil	Heavy oil	Gas	Vacuum			Body
MCT			●	●		●		●	●	●		Brass	N V	1/4-3/4	0.10-0.80
MJT			●	●		●		●	●	●		Brass	N J V	-	0.10-0.42
MRJ			●	●		●		●	●	●		Brass	N J V	-	0.10-0.31
MUST			●	●		●		●	●	●		S.S.#303	N V	1/8-3/8	0.02-0.80
MUT			●	●		●		●	●	●		Forged brass	V	1/8-3/8	0.02-0.31
MZT			●	●		●		●	●	●		Forged brass	N J V Z	1/8-3/4	0.08-0.80
MUA			●	●		●		●	●	●		Forged brass	N	1/4,3/8	0.10-0.12



NOTE: Seal-code N: NBR, J: EPDM, V: VITON, P: PTFE, T: TEFLON, R: RUBY, Z: FFKM, S: SILICON